

Radiant Source Model Report

Source Model Information


Source Description Product ID: Source Type: LED Model Number: 3528plcc4 0.2W紅 Serial Number: Manufacturer: Refond Source Description Notes:	Scan Environment measurement Type: Photometric SIG Orientation: SIG400/ Vertical Applied (volts): 2.20V Current Applied (amps): 50mA Watts Measured: 0.11W Cx: 0.6940 Cy: 0.3056 ϕ :8.311 lm Scan Results Date Scanned: 22-Apr-2024 Number of Measurements: 2736 Azimuth Range: 0 to 90, Step 5 Polar Range: 0 to 360, Step 5 Rated Lumens/Watts:75.55 lm/W
--	--


Alignment Images

Test Origin Coordinate Chart


(The deviation of the position of the luminescent center relative to the center of the bracket.

x= 0.00mm, y=-0.0155 mm, z= 0.00mm)

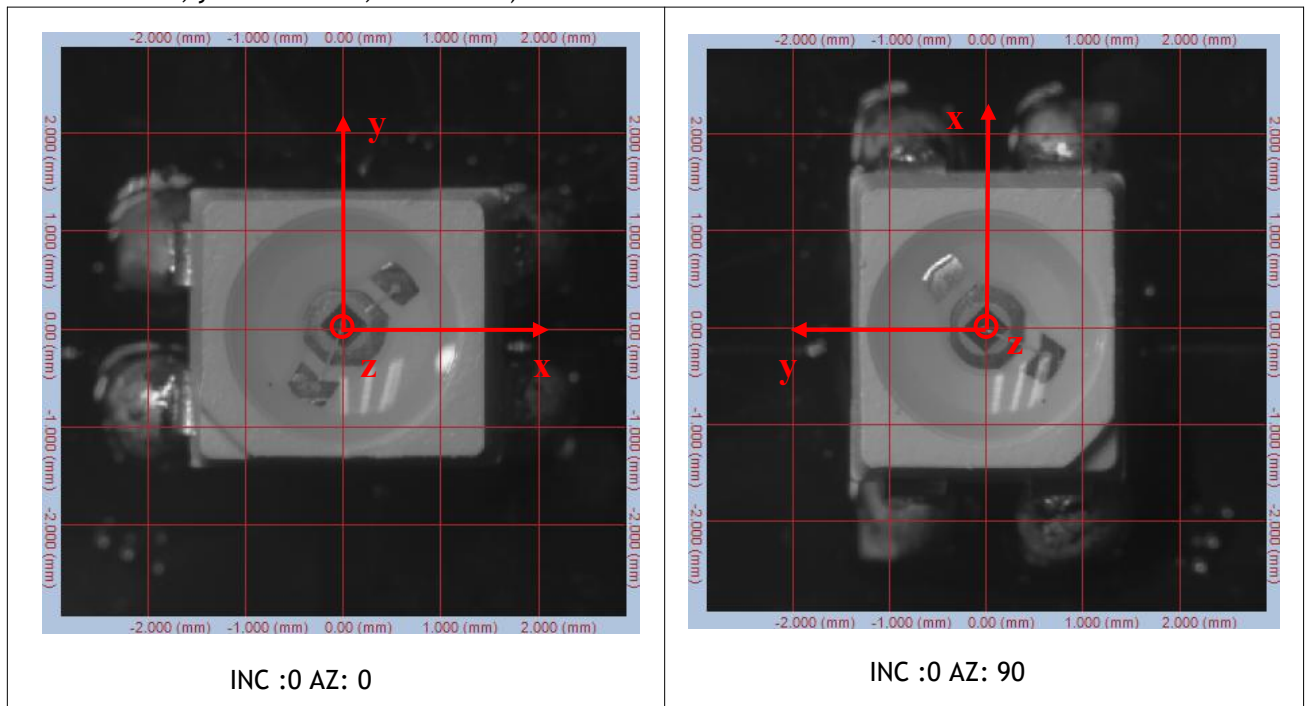

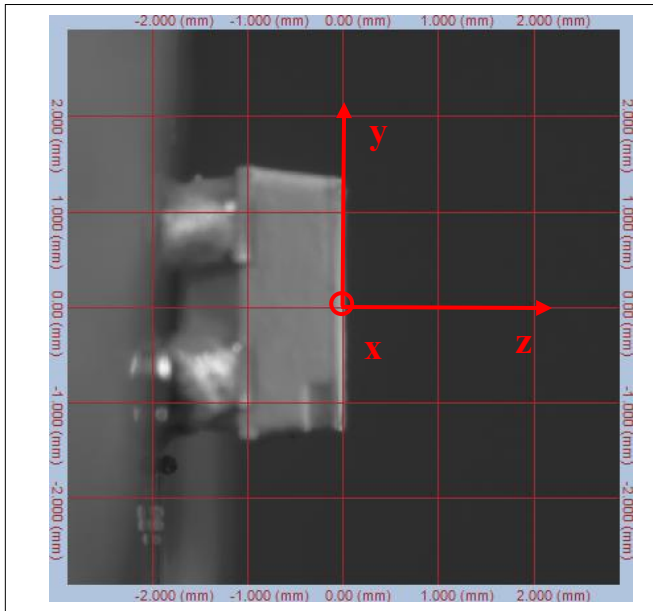


INC :90 AZ: 0

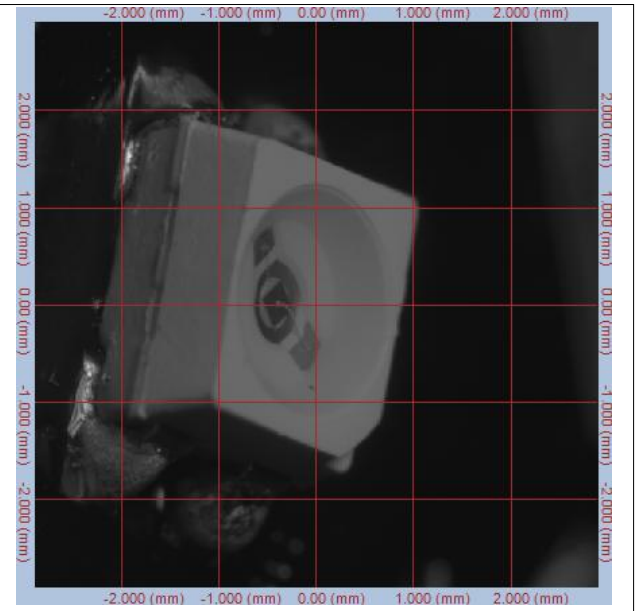


INC :50 AZ: 75

Summary of Test Results


Top-View True Color Image

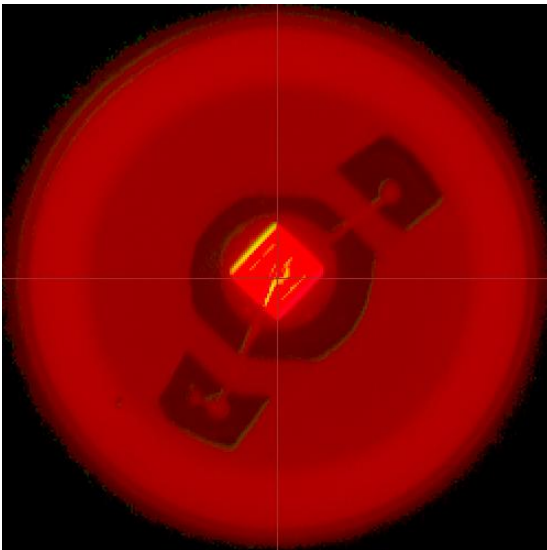


Top-View Luminance Image

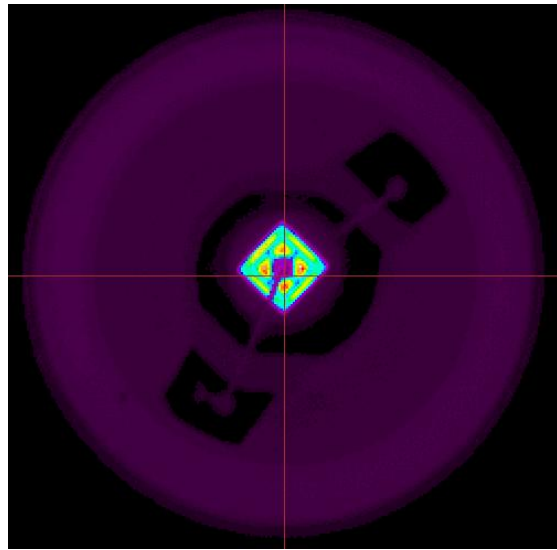


Intensity(traced to infinity)

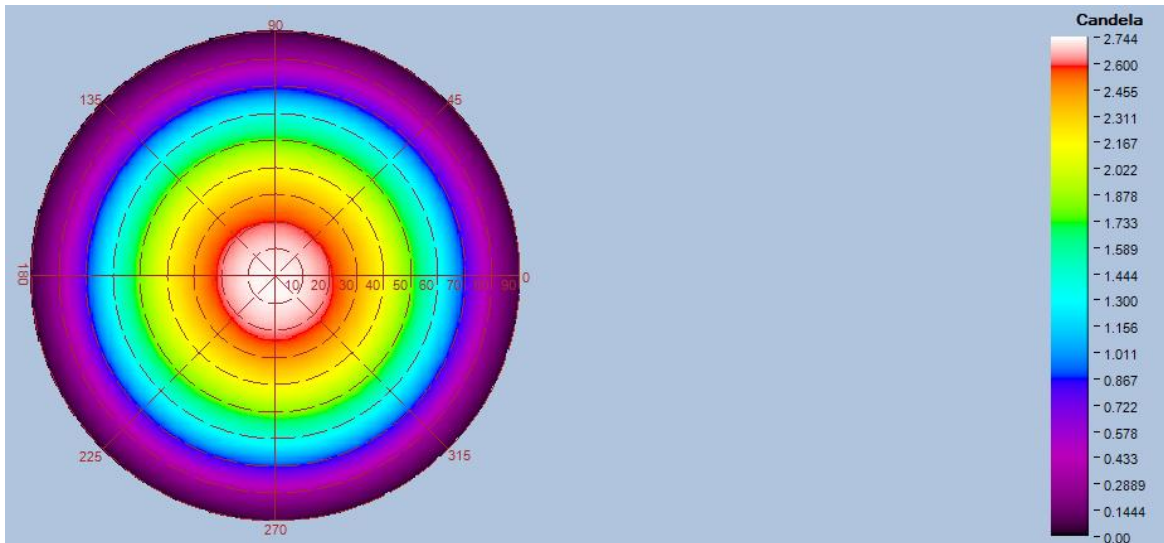


Intensity(traced to infinity) Cross Section Luminous Intensity(Candela)

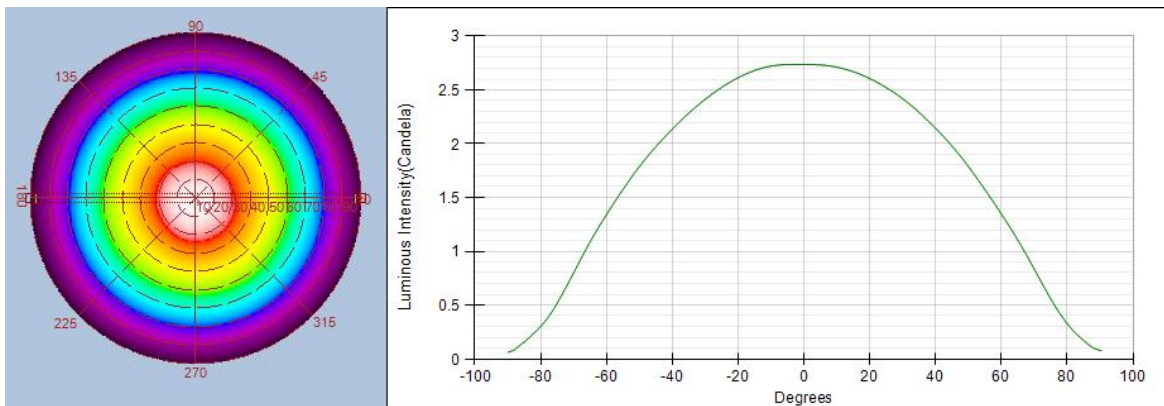


Intensity(traced to infinity) Cross Section Luminous Intensity(Candela)

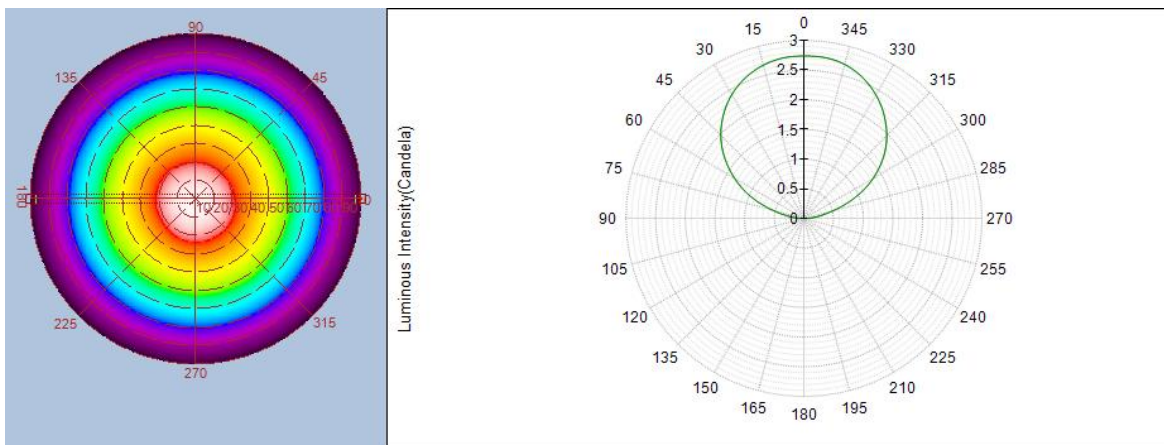

Intensity(traced to infinity) Iso-Plot

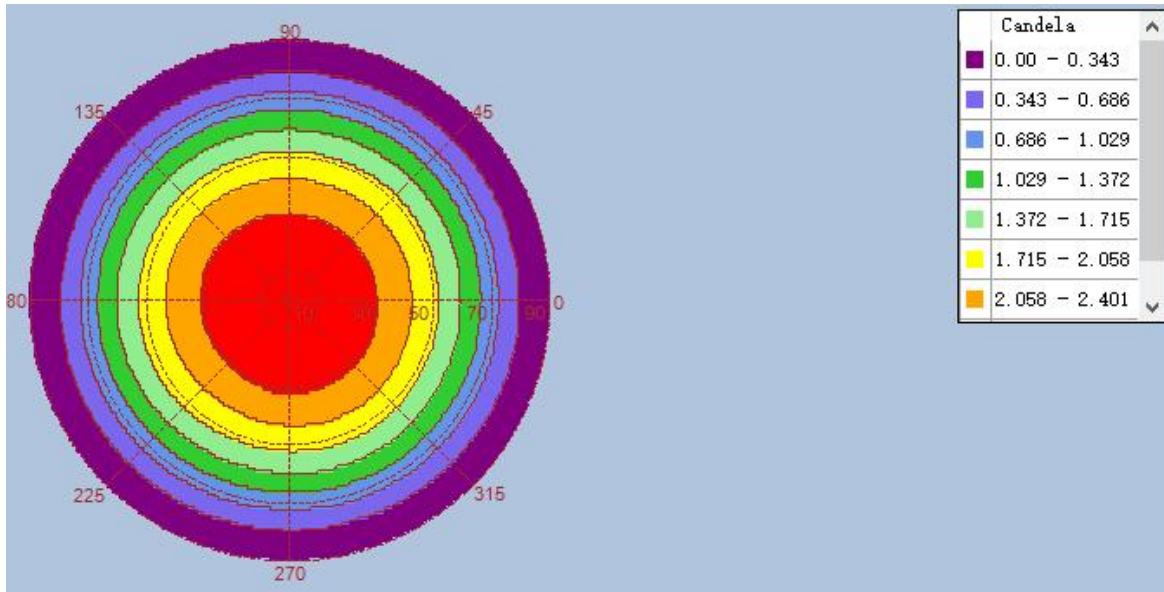



Intensity(traced to infinity) 3D Iso-Plot

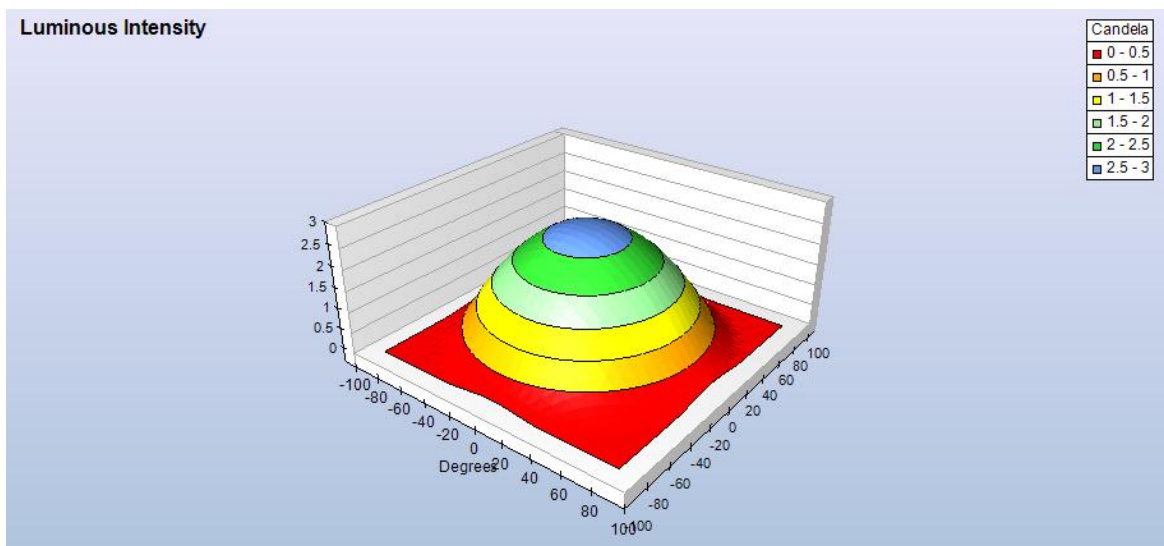

Illuminance Distribution Diagram

Data Processing Software	Prosource10.2.7	Simulation Software	TracePro 2020
Number of Rays	1000,000	Receiver	8mm*8mm Distance :0.1mm
Smoothness of Illuminance Distribution Curve	50	Smoothness of Photometric Curve	20

Illuminance Distribution Diagram

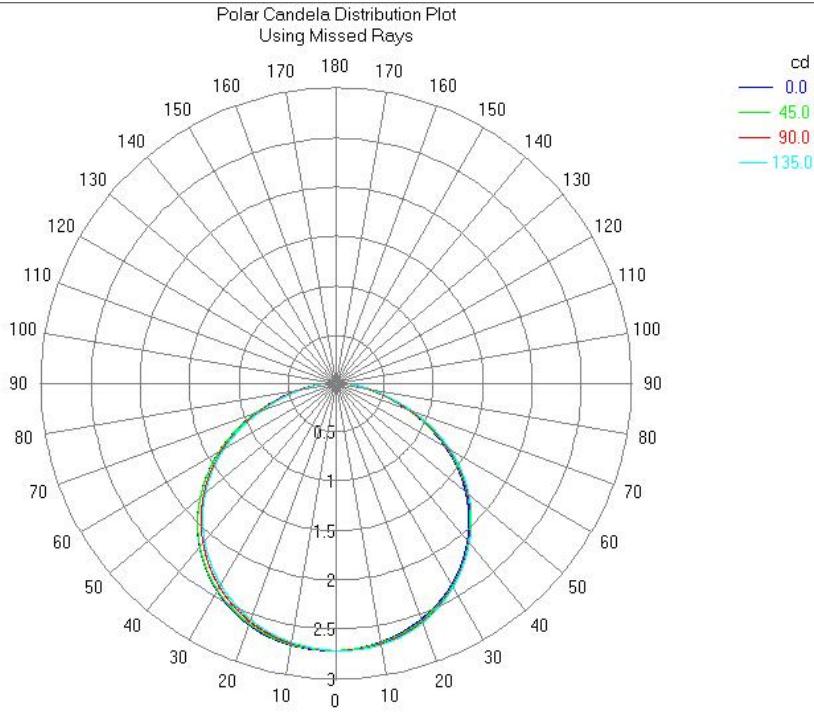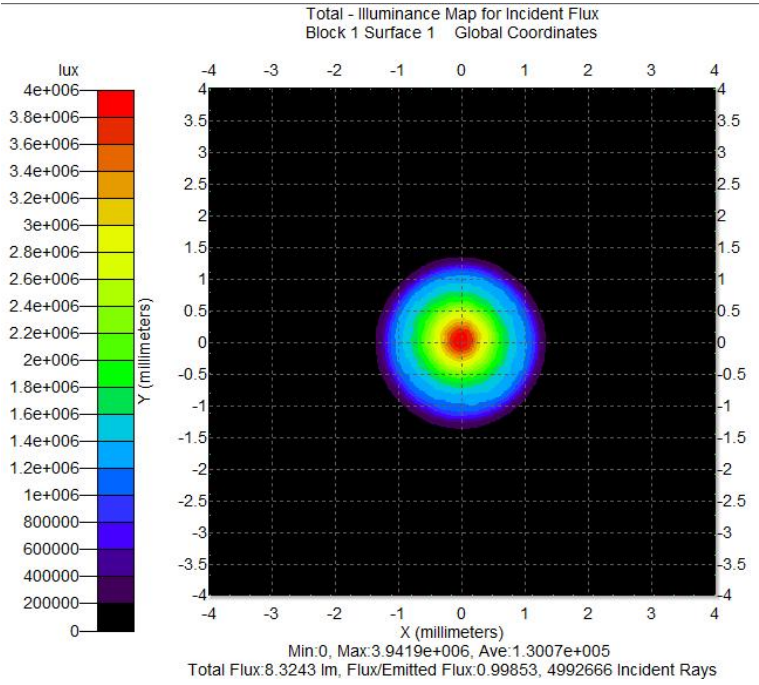

-END-